
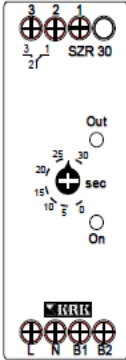


TIMER

SZR

UG-13/REV 00

General Specifications
 SZR are the delay on timer. When the application of voltage to the timer's supply inputs, the counter starts counting (1-2 contacts are shortcut). End of the adjusted time, counter stops counting and the output becomes on (2-3 contacts are short cut). When the supply voltage cut off, the timer reset.


Technical Specifications

Type	Time Interval (sec)	Electrical Connection	Weight (kg)
SZR 60	0,6...60sec	PCB Clamp	0,09

Supply Voltage : 220 Vac \pm %20 (L,N), 50 / 60 Hz
B1,B2(Vac) (SZR) : 24 ; 12
B1,B2(Vdc) (SZR) : B1:+ ; B2: -
Power Consumption : < 7 VA
Ambient Temperature : -5 °C...+55 °C
Control Output : Relay (Omron), 1 Changeover, 10A / 250 Vac
Electrical Life : 100.000 ops. (Resistive Load)
Connection : DIN 35 rail or Vertical Installation (Installation springs behind the box should be pushed outward to enable screwing).


Connection Schemes

SZR



Dimensions

SZR



MANUFACTURE BY:

KARACA
 KARACA PAZARLAMA VE TIC. LTD. ŞTİ
 Karadeniz Caddesi Kuyu Sokak No:30 A Dudullu / İSTANBUL / TÜRKİYE
 Tel: 0216 612 22 89 - 90 Fax: 0216 612 36 40
 Web: www.krk.com.tr E-mail: info@krk.com.tr

MARKETED BY:

KAYCEE INDUSTRIES LIMITED.
 32, RAMJIBHAI KAMANI ROAD,
 BALLARD ESTATE, MUMBAI-400 001 INDIA
TEL: +91 (022) 22613521, 22.23 **FAX: +91** (022) 22616106
E MAIL: kayceeindtd@vsnl.com
WEB SITE : www.kayceeindustries.com